



141 Rodeo Drive  
Edgewood, NY 11717  
Toll Free 888.844.4720  
www.tiitech.com

### Model FP01-01-01

Fiber Plate with Adapter Tower, Pigtail Management and Splice Sleeve Holder  
Used in 169F, 171F, 506F, 507F, 508F, 509F, FET1, ONT-SE1




## Installation Note

### Description

The FP01 Fiber Plate can be configured for 1, 2 or 4 ports.

The FP01 Fiber Plate has splicing provisions for two 3mm splice sleeves. They are located at the top of the Fiber Plate and are secured under a snap on cover. The Fiber Plate includes opposing fingers to manage and secure pigtail.

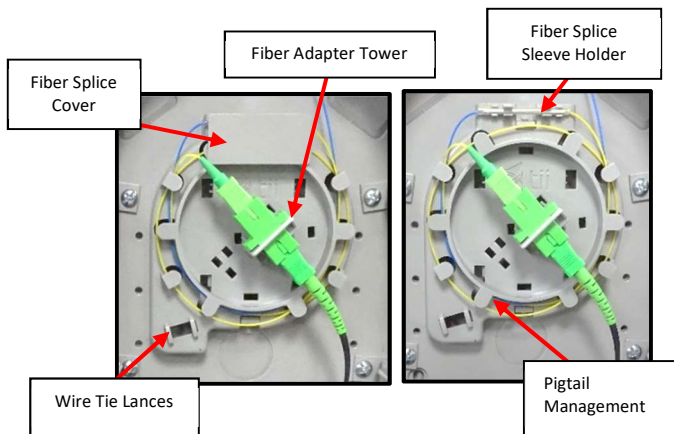

### Installation

1. Snap the FP01-01-01 adapter plate into the desired enclosure.
2. Bring the unconnectorized drop cable into enclosure as per installation instructions of the chosen enclosure.
3. Splice the feeder fiber to a fiber pigtail or directly to the customer fiber. If using a pigtail, insert fiber connector into the upper port of the SC adapter.
4. Remove Splice Cover and insert splice sleeve into holder, manage excess pigtail around fiber plate and replace cover. Replace Splice Cover.
5. If applicable, connect the distribution fiber to the opposing side of the provided adapter on the FP Fiber Plate.
6. Secure slack fiber as per installation instructions of the chosen enclosure.