

WSE-288


Wall Mount OCEF Splice Enclosure

Splice Vault

CEV / Huts

FTTB Service Demarcation

LAN Centralized Splicing

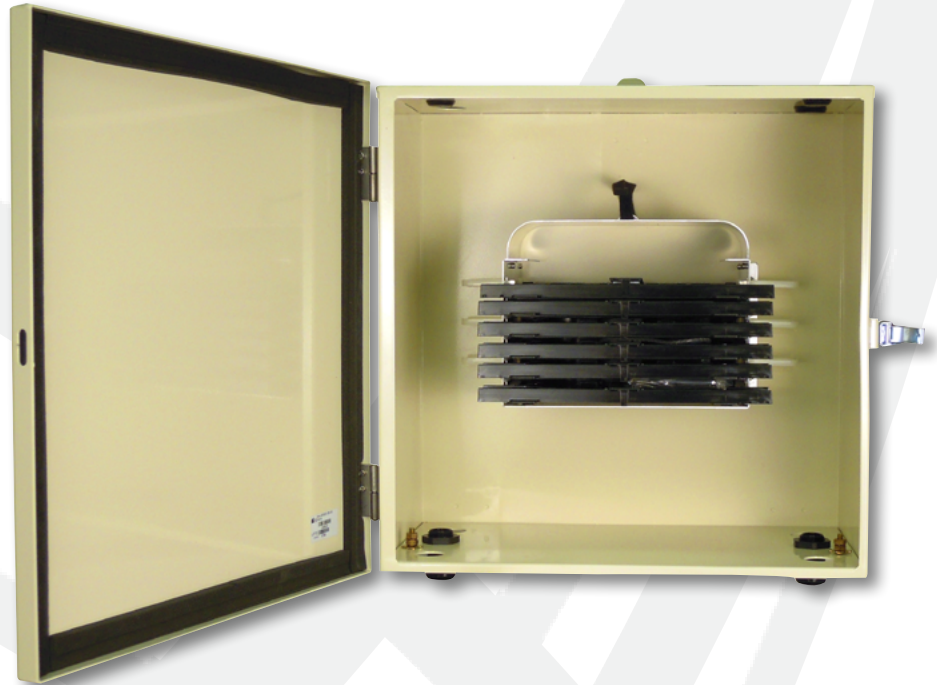

Indoor/Outdoor NEMA-4 wall mount fiber optic splice enclosure to transition from OSP to premise optical cable. WSE provides storage and protection of fiber splices. Multiple NPT compatible cable entry/exit locations are provided on the top and bottom with grommets to prevent dust and water from entering the housing. Integrated ground points are provided for proper grounding of armored cables.

KEY PRODUCT BENEFITS

- ▶ High capacity with small footprint
- ▶ 3 point mounting feet for easy installation
- ▶ Removable, lockable hinged door
- ▶ Top and bottom cable entry
- ▶ 4 ea 1" NPT cable gland compatible ports
- ▶ 8 ea ¾" NPT cable gland compatible ports
- ▶ Easy re-entry and fiber rearrangement
- ▶ Internal and external ground studs for proper grounding of armored cable



Tii Technologies Inc.

Corporate Headquarters:


141 Rodeo Drive
Edgewood, NY 11717

Phone: 631.789.5000

Fax: 631.789.5063

Toll Free: 888.844.4720

sales@tiitech.com

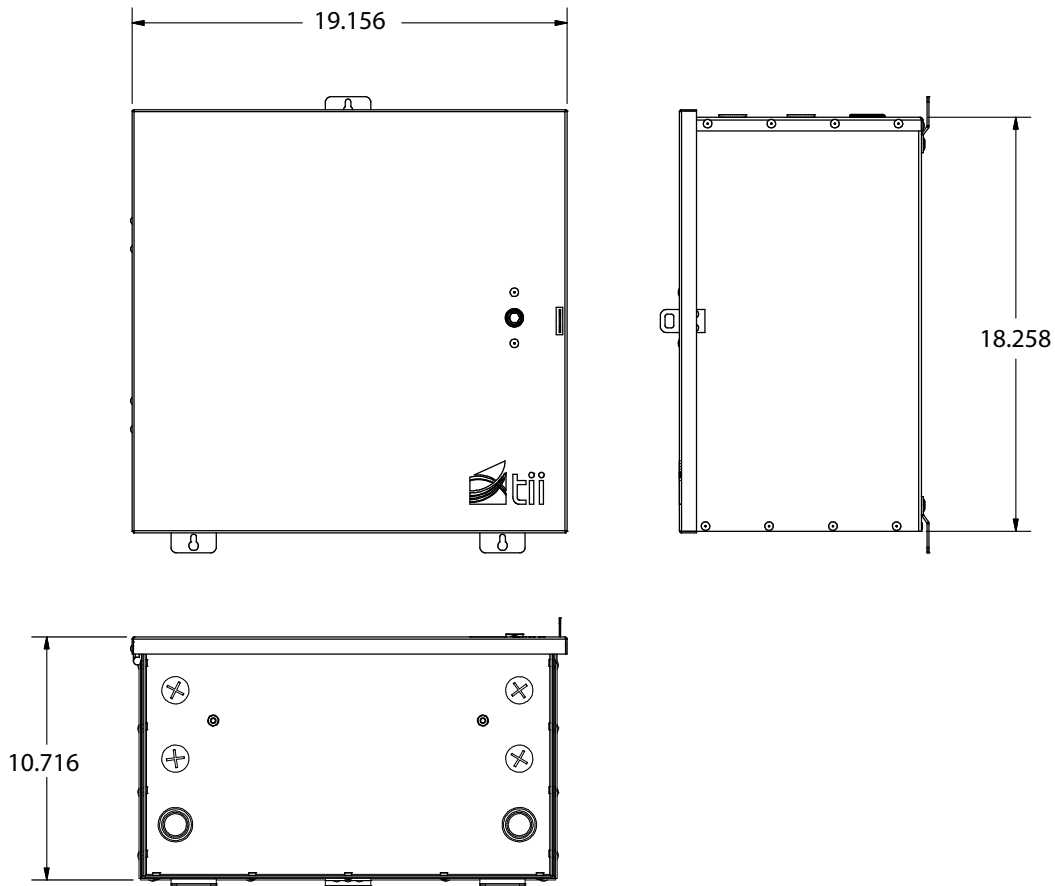

Dimensions are in Inches

SPECIFICATIONS

Splice Trays	6 universal telescoping
Splice Capacity	288 single / 864 mass fusion
Cable Entry Points	6 top and 6 bottom
Cable Diameter	0.25" to 1.25"
Grounding Studs	2
NEMA	4/12/13
Dimensions	18.5" H x 20" W x 11.5" D
Material	0.08" aluminum powder coat beige

ORDERING INFORMATION

Model #	Description	Standard Pkg.
WSE-288	Wallmount Splice Enclosure 6 HD Splice Tray Capacity	1 ea. 29" x 27" x 14" - 28 lbs.
TRAY48SF	Splice Tray High Density 48 Single Fusion	1 ea. 14" x 14" x 2" - 2 lbs.
TRAY18MF	Splice Tray High Density 18 Mass Fusion	1 ea. 14" x 14" x 2" - 2 lbs.
KT-CG-NPT-1	Cable Compression Gland NPT 1" (0.748 - 1.0")	10 ea. 12" x 8" x 5" - 3 lbs.
KT-CG-NPT-3	Cable Compression Gland NPT 3/4" (0.512 - 0.709")	10 ea. 12" x 8" x 5" - 3 lbs.