


Provides grounding means for electrical equipment by permanently connecting to a building's AC ground



	442	442C	442CGT	442CSE
Compact size capable of terminating up to a #6 gauge grounding wire using a standard slotted screwdriver	✓	✓	✓	✓
Auxiliary AC receptacle	✓	✓	✓	\checkmark
Ground and wiring indicator	✓	✓	✓	\checkmark
UL Listed	✓	✓	✓	\checkmark
cULus Listed	\checkmark	\checkmark	\checkmark	
Coax F-type connectors provide in and out connections for the signals on the center conductors of the coax cable, while shield is bonded to common ground		✓	✓	✓
Top position grounding prong			\checkmark	
Designed to provide grounding means where only two prong AC receptacles are utilized				✓
Auxiliary AC outlet on side of unit to reduce wall clearance				\checkmark

442 SERIES GROUNDING MODULES FOR MDU APPLICATIONS

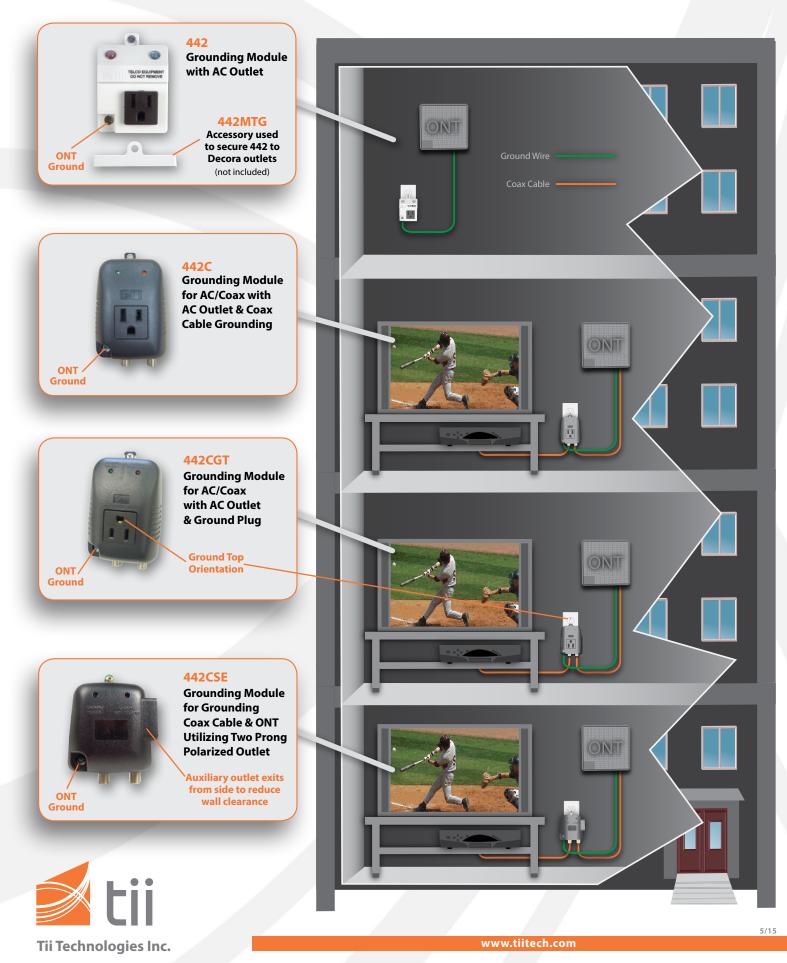

141 Rodeo Drive • Edgewood, NY 11717 Phone: 631.789.5000 • Fax: 631.789.5063 • Toll Free: 888.844.4720 • sales@tiitech.com