

24 Series

Indoor Building Entrance Terminal


CPE/Premise Wiring

Headend/CO

MDU

Utility/Municipality

Wireless

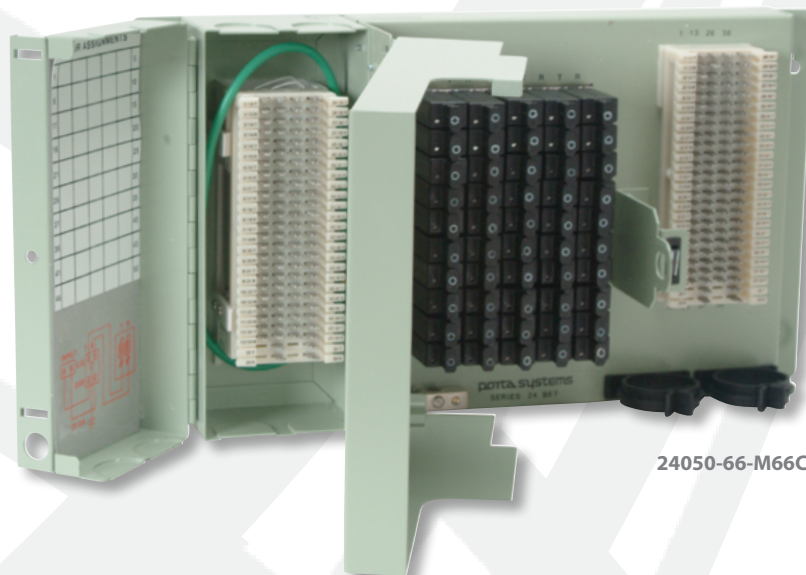

24050-66-M66C

At the point of demarcation, Building Entrance Terminals (BETs), safeguard communication equipment from damaging electrical surges that may get onto incoming lines.

KEY PRODUCT BENEFITS

- ▶ Available in 25, 50 and 100 pair counts
- ▶ 66 input/output
- ▶ Industry standard 5-pin protector field sealed to protect from moisture and corrosion
- ▶ Available with gas tube protector module 175-3C1EW-NL factory installed
- ▶ Splice chamber for input cable
- ▶ Separate cover to secure protector field and output terminations
- ▶ Compact footprint
- ▶ Manufactured from 18 gauge, epoxy powder coated steel

INDUSTRY STANDARDS

- ▶ UL 497 Listed for primary and secondary protection
- ▶ Telcordia GR-937/GR-2916



Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717


Phone: 631.789.5000

Fax: 631.789.5063

Toll Free: 888.844.4720

sales@tiitech.com

24 Series BETs with 66, 110 or RJ Terminations

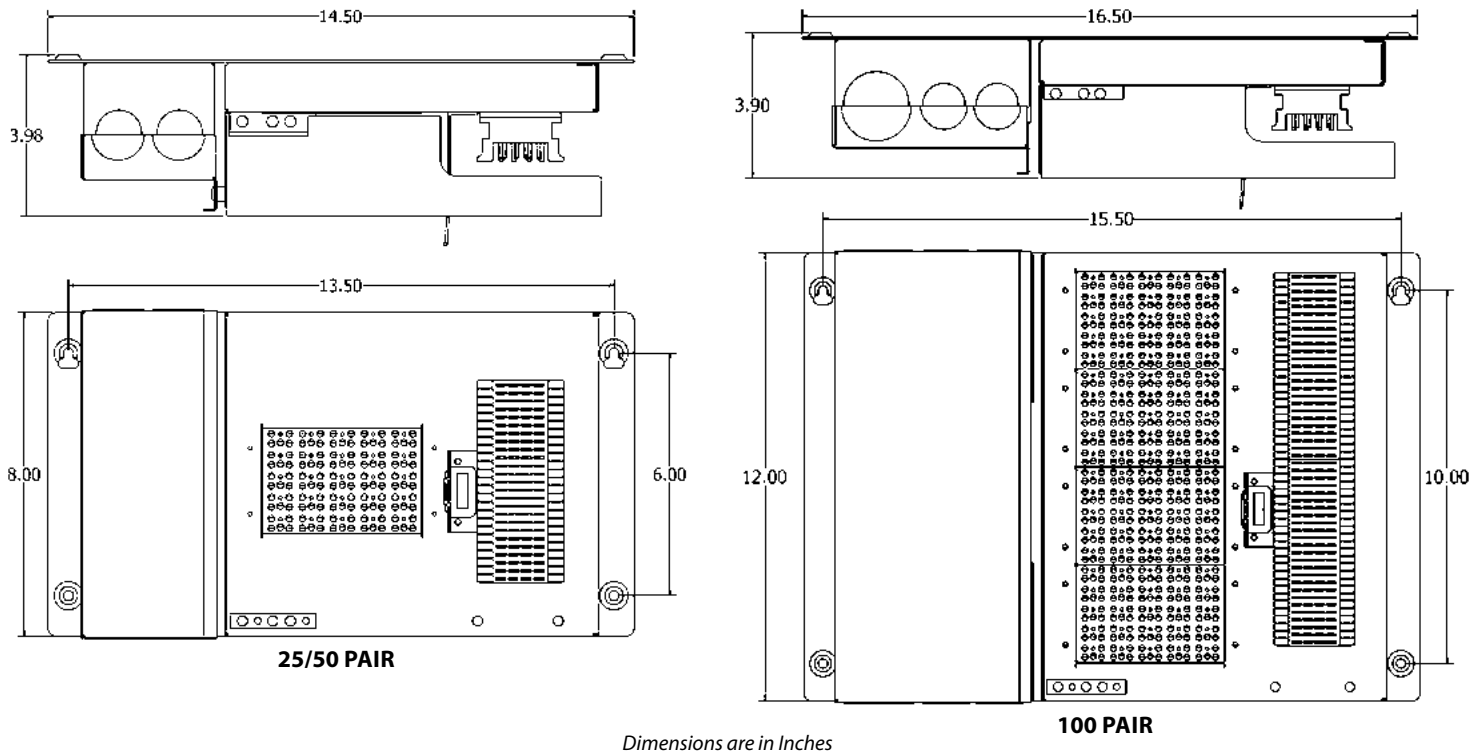

Pair Count	Dimensions (height x width x depth)
25 Pair	8" x 14.5" x 4" (20.3 cm x 36.8 cm x 10.2 cm)
50 Pair	8" x 14.5" x 4" (20.3 cm x 36.8 cm x 10.2 cm)
100 Pair	12" x 16.5" x 4" (30.5 cm x 41.9 cm x 10.2 cm)

ORDERING INFORMATION

Model No.	Pair Count	Input	Output	Protectors Installed	Cover
24025-66-M66C	25	66	66	No	Yes
24025-66-M66PC	25	66	66	Yes	Yes
24050-66-M66C	50	66	66	No	Yes
24050-66-M66PC	50	66	66	Yes	Yes
24100-66-M66C	100	66	66	No	Yes
24100-66-M66PC	100	66	66	Yes	Yes

Units with protectors installed have Model # 175-3C1EW-NL