

MP Series

25 Pair BET, BET/NID Modular Panel Assemblies


CPE/Customer Premise

MDU


Utility/Municipality

DOT


Wireless

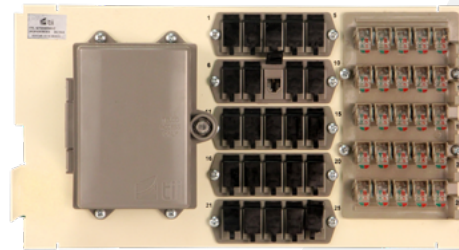

MP025MNOPN000

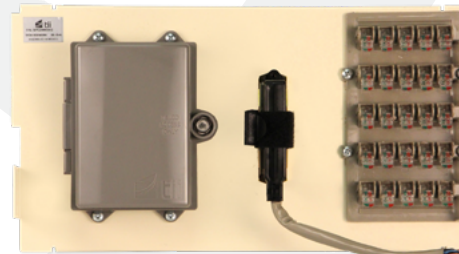

MP025RNOPN000

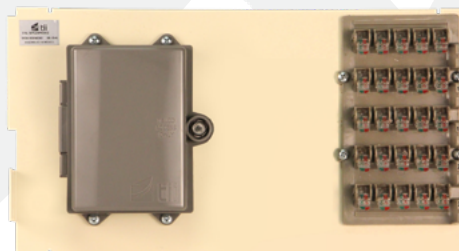

MP025PNOPN000

Tii's 25 Pair MP Series Modular Panels can simply be added Tii's Outdoor or Indoor Modular Series BET/NIDS as required for growth.

KEY PRODUCT BENEFITS

- ▶ 25 pair assembly plates
- ▶ Input options include 710 and MS2 termination, raw cable and stubs
- ▶ Output options include Toolless IDC and RJ21
- ▶ Industry standard 5-pin protector field sealed to protect from moisture and corrosion
- ▶ Available with factory installed solid state or gas tube protectors
- ▶ BET/NID Versions Utilize Tii Auto-Jack®
- ▶ CAT5e transmission performance
- ▶ Aluminum construction; beige powder coat

INDUSTRY STANDARDS

- ▶ IDC Connector - Telcordia TR-NWT-001195
- ▶ BET - Telcordia GR-937/GR-2916
- ▶ NID - Telcordia GR-49/GR-239
- ▶ UL Listed to 497




Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

MP Series BETs

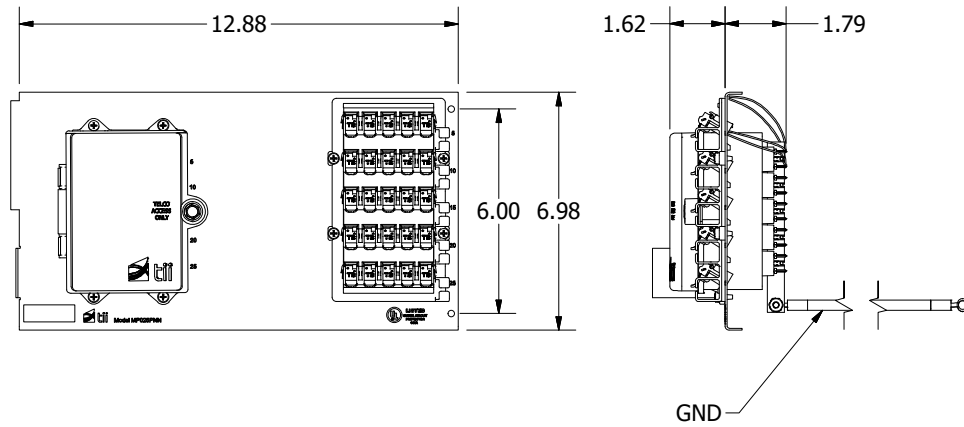

Dimensions are in Inches

ORDERING INFORMATION

MP	-025	-X	-XXX	-X	-XXX	-XX
	Pair Count	Output	Protection	Input	Stub Length	OEM
	025	N = None M = Tooless IDC & NID P = Tooless IDC R = Tooless IDC & RJ21 S = RJ21	NOP = No Protectors 3B1ES = 300V Solid State Black, no Test Points 3B1FS = 240V Solid State Black, no Test Points 3B3ES = 300V Solid State Red, no Test Points 3B3FS = 240V Solid State Red, no Test Points 3C1ES = 300V Solid State Black, Test Points 3C1FS = 240V Solid State Black, Test Points 3C3ES = 300V Solid State Red, Test Points 3C3FS = 240V Solid State Red, Test Points 6B1E = 350V Gas Tube, Black, PTC, no Test Points 6C1E = 350V Gas Tube, Black, PTC, Test Points 3B1E = 350V Gas Tube, Black, no Test Points 3C1E = 350V Gas Tube, Black, Test Points	G = Stubbed Only H = 4005 GPM (MS2 Gel) K = 4005 DBM (MS2 Dry) P = 710 SC1 (710 Gel) T = 710 SD1 (710 Dry) N = Raw Cable	000 = None 007 = 7 Ft 025 = 25 Ft	Contact Sales