



Ribbon Premise

Fiber Optic Cable

Data Center

Headend/CO

Utility/Municipality

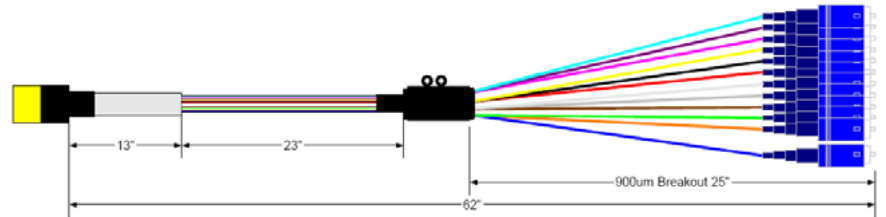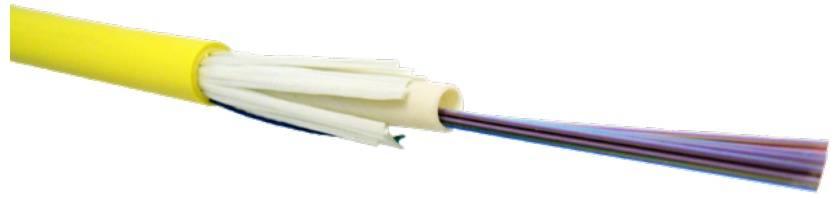

RFRB-R9SCSC001M

The ribbon premise optical cable is intended for high density installations. The assembly is the ideal cable for factory terminating one end of the cable and mass fusion splicing the pigtail end in a vault or splice panel.

KEY PRODUCT BENEFITS

- ▶ 100% visual and optical tested
- ▶ Dry central tube
- ▶ Flexible design for indoor routing
- ▶ Breakout length designed for perfect patch panel fit
- ▶ Accommodates up to 144 fibers
- ▶ Available in several fiber modes and a variety of connector types

INDUSTRY STANDARDS

- ▶ Exceeds TIA and Telcordia requirements



Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717

Phone: 631.789.5000

Fax: 631.789.5063

Toll Free: 888.844.4720

sales@tiitech.com

Ribbon Premise Fiber

SPECIFICATIONS

	24-72 Fiber		96-144 Fiber	
Diameter (in)	0.51		0.60	
Weight (lb/1,000ft)	89		113	
Min Bend Radius Loaded/Installed (in)	10.2 / 5.1		12 / 6.0	
Max Loading Short Term/Installed (lb)	600 / 200			
Operational Temperature Range	-18 to + 50 C			
Fiber Code	R	K	C	S
Fiber Type	Singlemode	MM62.5 OM1	MM50 OM2	MM50 OM3
Wavelength (nm)	1310/1550	850/1300	850/1300	850/1300
Maximum Attenuation (dB/km)	0.4/0.3	3.5/1.0	3.5/1.5	3.0/1.5
Serial Gigabit Distance (m)	5000/ -	300/550	600/600	1000/600
Serial 10 Gigabit Distance (m)	10000/40000	33/ -	82/ -	300/ -
Flame Rating	Available in OFNR (FT-4) or OFNP (FT-6)			
Insertion Loss	Singlemode <=0.3dB, Multimode <=0.4dB			
Back Reflection	<=-55dB UPC -65dB APC, <=-25dB PC (MM)			

ORDERING INFORMATION

X	X	RB	—	X	X	XX	XXX	X
	Fibers			Rating	Jacket Color	Connectors	Length	UOM
R = SM 8.3 SMF28e	F = 24			R = Riser	1 = Blue (N)	FC - FC	3 Digit, e.g. 001	F = Feet
N = SM Bend Insensitive	J = 48			P = Plenum	2 = Orange (K,C)	FA - FC APC		M = Meters
K = MM62.5 OM1	L = 72				3 = Green	LC - LC		
C = MM50 OM2	N = 96				4 = Brown	LA - LC APC		
S = MM50 OM3	P = 144				5 = Slate	SC - SC		
					6 = White	SA - SC APC		
					7 = Red	ST - ST		
					8 = Black	NA - Pigtail		
					9 = Yellow (R)			
					V = Violet			
					R = Rose			
					A = Aqua (S)			

INFORMATION CONTAINED IN THIS PUBLICATION IS PROVIDED ONLY FOR YOUR CONVENIENCE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. TII TECHNOLOGIES MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE; AND TII TECHNOLOGIES DISCLAIMS ALL LIABILITY ARISING FROM THE USE OF THIS INFORMATION.