

RM1U2S Series

Swingout Patch and Splice Panel

CPE/Premise Wiring

Data Center

DOT


FOTP

MDU

PON

Utility / Municipality

Wireless

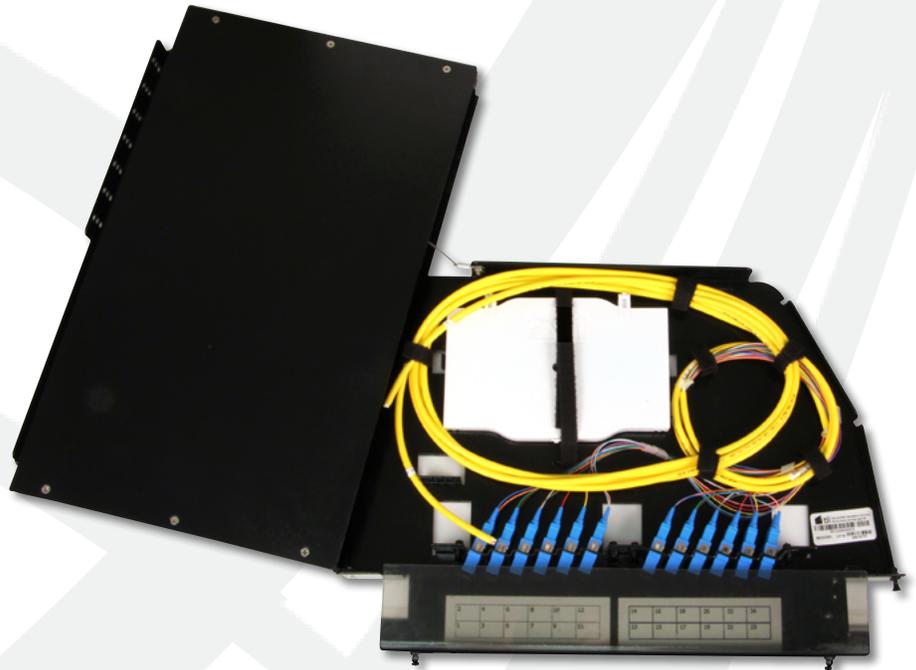

RM1U2S-024-R-SC-9

The RM1U2S is a 1 RU, 2 termination panel rackmount fiber distribution unit designed to support both patching and splicing in one unit. The enclosure has a swing out master panel that allows for easy access of terminations, fiber management and splicing.

KEY PRODUCT BENEFITS

- ▶ Used in Telecom Closets, Data Centers and Remote Distribution Terminals
- ▶ Multiple Pigtail and Splice Tray options
- ▶ Available in various Fiber Termination Connectors
- ▶ Accommodates up to 24 Fibers
- ▶ Available with factory loaded adapter plates, splice trays and pigtails
- ▶ 19 or 23" rack mountable
- ▶ Direct termination or fusion splice pigtails
- ▶ Swing out master tray
- ▶ Multiple tie down points for buffer tubes and cable management
- ▶ Up to 2 adapter plates




Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

RM1U2S Series

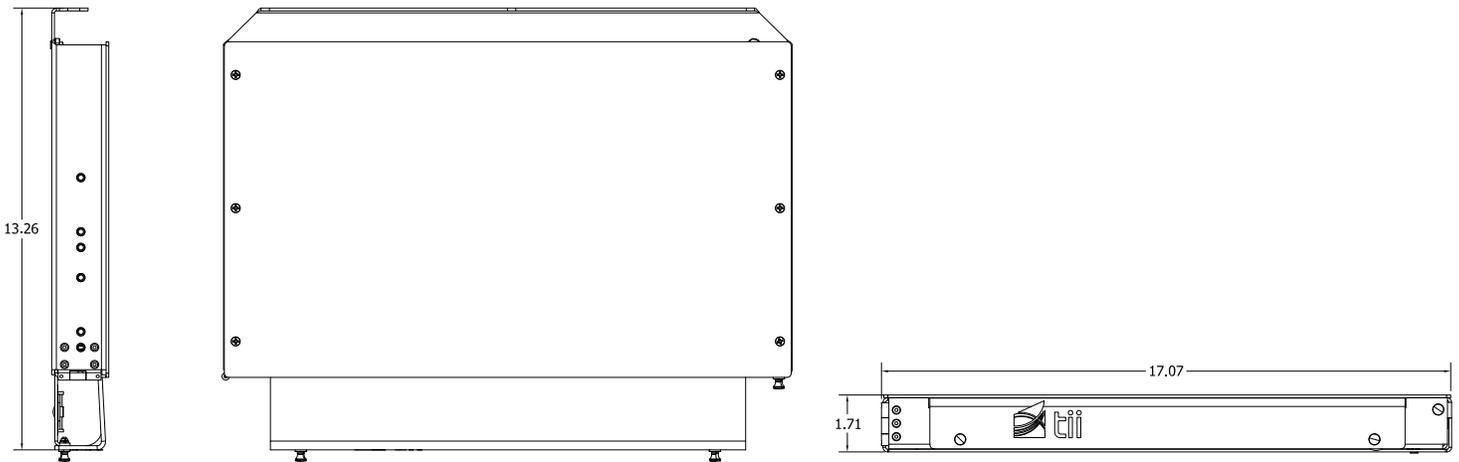

Dimensions are in Inches

SPECIFICATIONS

Adapter Plates	2
Splice Trays	2
Protrusion	2.75"
Dimensions	1.75" H x 17.0" W x 13.26" D
Packaging	5.25" H x 20.5" W x 17.5" D
Weight	7 lbs empty, 9 lbs typical loaded
Material	0.08" Aluminum, Black powder coat

MODEL NUMBER MATRIX

RM1U2S	-XXX	-X	-XX	-X
	Fiber Ports	Fiber Type	Adapter	Pigtails & Splice Trays
	006	R = Singlemode	LC = LC	N = None
	008	K = MM62.5 OM1	SC = SC	9 = 900um
	012	C = MM50 OM2	SA = SC APC	R = 12 Fiber Ribbon
	016	S = MM50 OM3		5 = 250um
	018			
	024			

ACCESSORIES

Model #	Description
RM1U2S	1 RU Patch Panel, Empty 2 Adapter Plate Capacity
FST-ASF24	Splice Tray 24 Single Fusion
FST-AMF06	Splice Tray 6 Mass Fusion, 72 Fibers
LG1-xxxxxx-B	LG1 Series Adapter Plates in Black (See LG1 product guide)