

SHR Series

*Preterminated
Stubbed
Rackmount
Housings*


CPE/Premise Wiring

Data Center

Headend/CO

FTTx

MDU

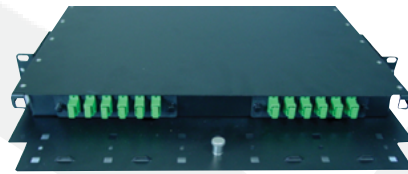

1U 6-24 Ports




2U 24-48 Ports



3U 48-96 Ports



4U 72/96/144 Ports

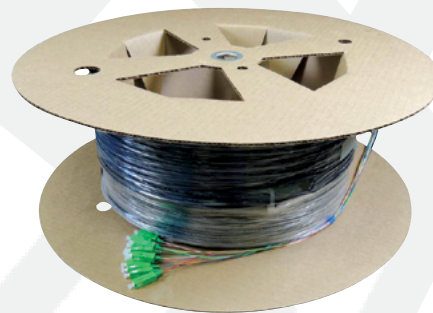

The Stubbed Housing Rackmount (SHR) Series allows for flexible deployment and simplified future expansion utilizing plug and play configurations, including a combination of fusing splicing and preterminated cable assemblies.

KEY PRODUCT BENEFITS

- ▶ Plug and play
- ▶ 19 or 23 inch rackmount
- ▶ Factory loaded with custom length fiber assemblies
- ▶ Protective pulling grip installed (if both ends terminated)

INDUSTRY STANDARDS

- ▶ Meets GR-771 requirements



Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive

Edgewood, NY 11717

Phone: 631.789.5000

Fax: 631.789.5063

Toll Free: 888.844.4720

sales@tiitech.com

SHR Series

SPECIFICATIONS

	1U	2U	3U	4U
Typical Port Options	12/18/24	24/36/48/72	48/96	72/96/144
Rack Units (RU)	RM1U3B	RM2U6B	RM3U8B	RM4UXB
Dimensions (LxWxH) (in.)	14.25 x 17 x 1.75	14.25 x 17 x 3.5	14.25 x 17 x 5.25	14.25 x 17 x 7
Packaging Dim. (in.)*	20 x 20 x 10	20 x 20 x 15	20 x 20 x 15	20 x 20 x 20
Shipping Weight (lbs.)*	20	25	30	40

* Estimated shipping size and weight based on 100 ft of non-armored indoor distribution 900um tight buffer cable lowest density listed.

CUSTOM MODEL NUMBER MATRIX

SHR	X	-X	X	X	X	X	X	-XX	XX	XXX	X
Enclosure Style	Fiber Mode	# of Fibers	Cable Type	Fiber Type	Rating	Jacket Color	Enclosure End	Loose End	Length	UOM	
1 = 1RU	R = Singlemode	6 = 6	D = Indoor Distr.	5 = 250um	R = Riser	2 = Orange	FC = FC	FC = FC	3 Digit	F = Feet	
2 = 2RU	K = MM62.5 OM1	B = 12	I = Indoor/Outdoor	9 = 900um (<=24)	P = Plenum	8 = Black	FA = FC APC	FA = FC APC	e.g. 001	M = Meters	
3 = 3RU	C = MM50 OM2	F = 24	L = Loose Tube OSP	U = 900um (>24)	N = None OSP	9 = Yellow	LC = LC	LC = LC			
4 = 4RU	S = MM50 OM3	H = 36 J = 48 L = 72 N = 96 P = 144	R = Ribbon	B = Ribbon		A = Aqua	SC = SC SA = SC APC ST = ST	SC = SC SA = SC APC ST = ST NA = Pigtail			

INFORMATION CONTAINED IN THIS PUBLICATION IS PROVIDED ONLY FOR YOUR CONVENIENCE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. TII TECHNOLOGIES MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE; AND TII TECHNOLOGIES DISCLAIMS ALL LIABILITY ARISING FROM THE USE OF THIS INFORMATION.