

PLC9 Series


1xN PLC Splitter Module

FTTP

MDU

PON

Utility/Municipality

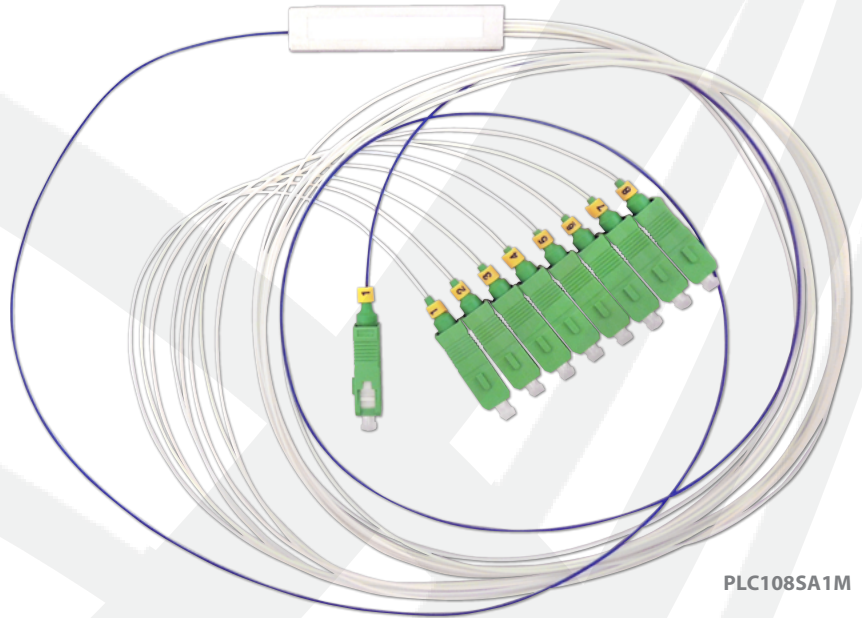

PLC108SA1M

1xN Planar Light wave Circuit (PLC) Splitters are based on the Plasma Chemical Vapor Deposition (P-CVD) technology for providing stable optical performance characteristics. PLC Splitter features guaranteed performance specifications and high reliability that surpass Telcordia requirements and is suitable for many Singlemode optical splitting applications.

KEY PRODUCT BENEFITS

- ▶ Low insertion loss and high maximum power tolerance
- ▶ Excellent splitting uniformity over broadband operating wavelengths
- ▶ Small rugged module packaging fits mass fusion splice trays
- ▶ G657A improved bend loss fiber
- ▶ Installations in extreme temperatures down -40°C

INDUSTRY STANDARDS

- ▶ GR-326, GR-1209, GR-1221
- ▶ IEC 61300
- ▶ ITU-T G.657.A1




Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

PLC9 Series

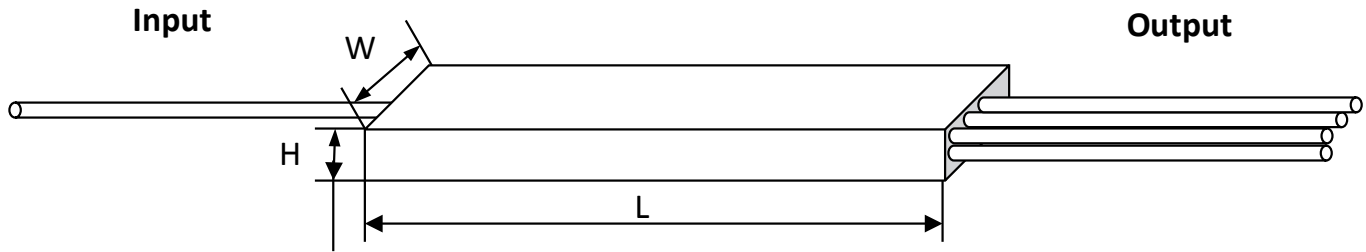

	1x4	1x8	1x16	1x32
Module Dimensions	H4xW7xL50mm	H4xW7xL60mm	H4xW12xL60mm	H6xW20xL80mm

Parameters*	1x4	1x8	1x16	1x32
Operating Wavelength	1260nm ~ 1650nm			
Insertion Loss, Max	7.5 dB	10.8 dB	13.5 dB	16.7 dB
Uniformity, Max	0.6 dB	0.8 dB	1.2 dB	1.5 dB
PDL, Max.	0.3 dB	0.3 dB	0.3 dB	0.3 dB
WDL	0.3 dB	0.3 dB	0.5 dB	0.5 dB
Return Loss, Min	50 dB UPC, 55 dB APC			
Directivity, Min	55 dB			
Cable Type	900um			
Cable Leg Length	1M (Standard)			
Operating Temperature	-40°C to +85°C Install, -55°C to +85°C Operational			
Module Dimensions	H4 x W7 x L50mm	H4 x W7 x L60mm	H4 x W 12x L60mm	H6 x W20 x L80mm
Compliance	ITU-T G.657.A1, GR-326, GR-1209, GR-1221			

*Parameter Performance values shown at room temperature, 1310/1550nm terminated

ORDERING INFORMATION

PLC	X	XXX	XX	XX
	Package	Ports	Connector	Leg Length
	9 = 900um	104 = 1x4 108 = 1x8 116 = 1x16 132 = 1x32	LA = LC-APC LC = LC-UPC SA = SC-APC SC = SC-UPC	1 M = 1 Meter

INFORMATION CONTAINED IN THIS PUBLICATION IS PROVIDED ONLY FOR YOUR CONVENIENCE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. TII TECHNOLOGIES MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE; AND TII TECHNOLOGIES DISCLAIMS ALL LIABILITY ARISING FROM THE USE OF THIS INFORMATION.