

## PLCR Series

### 1xN PLC Splitter

FTTP

MDU

PON

Utility/Municipality



PLCR132NA1M

1xN Planar Light wave Circuit (PLC) Splitters are based on the Plasma Chemical Vapor Deposition (P-CVD) technology for providing stable optical performance characteristics. PLC Splitter features guaranteed performance specifications and high reliability that surpass Telcordia requirements and is suitable for many Singlemode optical splitting applications.

#### KEY PRODUCT BENEFITS

- ▶ Low insertion loss and high maximum power tolerance
- ▶ Excellent splitting uniformity over broadband operating wavelengths
- ▶ Small rugged module packaging fits mass fusion splice trays
- ▶ G657A improved bend loss fiber
- ▶ Installations in extreme temperatures down -40° C

#### INDUSTRY STANDARDS

- ▶ GR-326, GR-1209, GR-1221
- ▶ IEC 61300
- ▶ ITU-T G.657.A1




**Tii Technologies Inc.**

**Corporate Headquarters:**

141 Rodeo Drive  
Edgewood, NY 11717  
Phone: 631.789.5000  
Fax: 631.789.5063  
Toll Free: 888.844.4720  
sales@tiitech.com

# PLCR Series

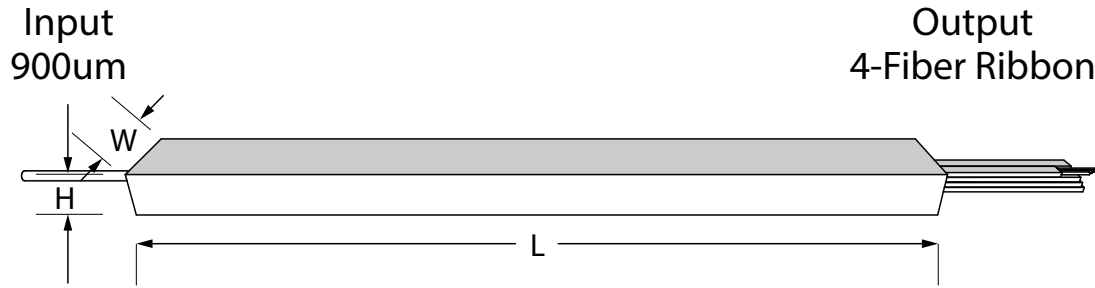

Parameters	1x4	1x8	1x16	1x32
Operating Wavelength	1260nm ~ 1650nm			
Insertion Loss, Max.	7.3 dB	10.5 dB	13.5 dB	16.7 dB
Uniformity, Max.	0.6 dB	0.8 dB	1.2 dB	1.5 dB
PDL, Max.	0.2 dB	0.2 dB	0.3 dB	0.3 dB
WDL	0.3 dB	0.3 dB	0.5 dB	0.5 dB
Return Loss, Min.	55 dB			
Directivity, Min.	55 dB			
Cable Type	G.657.A1 Fiber, 900um Input, 4 Fiber 250um Output			
Cable Leg Length	1M (Standard)			
Operating Temperature	-40°C to +85°C Install, -55°C to +85°C Operational			
Module Dimensions	4mm H x 4mm W x 40mm L		4mm H x 7mm W x 50mm L	
Compliance	ITU-T G.657.A1, GR-326, GR-1209, GR-1221			

## ORDERING INFORMATION

Model #	Description	Standard Pkg.
<b>PLCR104NA1M</b>	PLC Splitter SM Bare Fiber Ribbon 1x4 1M	1 ea. 12" x 12" x 2" - 1 lbs.
<b>PLCR108NA1M</b>	PLC Splitter SM Bare Fiber Ribbon 1x8 1M	
<b>PLCR116NA1M</b>	PLC Splitter SM Bare Fiber Ribbon 1x16 1M	
<b>PLCR132NA1M</b>	PLC Splitter SM Bare Fiber Ribbon 1x32 1M	