

PLCR Series

1xN PLC Splitter

FTTx

MDU

PON

Utility/Municipality



PLCR132NA1M

1xN Planar Light wave Circuit (PLC) Splitters are based on the Plasma Chemical Vapor Deposition (P-CVD) technology for providing stable optical performance characteristics. PLC Splitter features guaranteed performance specifications and high reliability that surpass Telcordia requirements and is suitable for many Singlemode optical splitting applications.

KEY PRODUCT BENEFITS

- ▶ Low insertion loss and high maximum power tolerance
- ▶ Excellent splitting uniformity over broadband operating wavelengths
- ▶ Small rugged module packaging fits mass fusion splice trays
- ▶ G657A improved bend loss fiber
- ▶ Installations in extreme temperatures down -40° C

INDUSTRY STANDARDS

- ▶ GR-326, GR-1209, GR-1221
- ▶ IEC 61300
- ▶ ITU-T G.657.A1




Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

PLCR Series

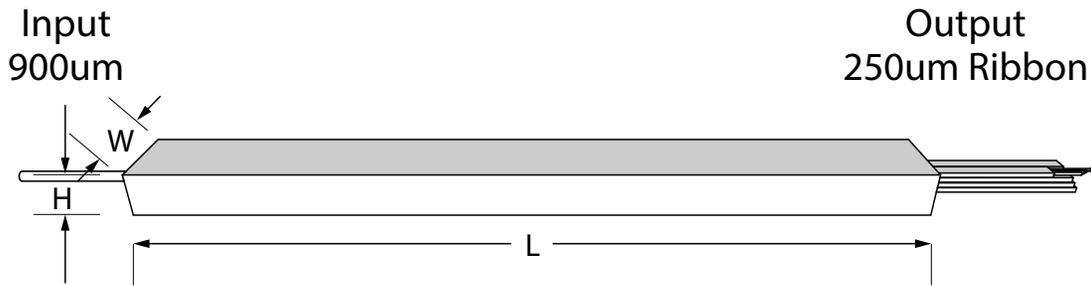

	1x4	1x8	1x16	1x32	1x64
Operating Wavelength	1260nm ~ 1650nm				
Insertion Loss, Max.	7.3 dB	10.5 dB	13.5 dB	16.7 dB	20.5dB
Uniformity, Max.	0.6 dB	0.8 dB	1.2 dB	1.5 dB	1.8 dB
PDL, Max.	0.2 dB	0.2 dB	0.3 dB	0.3 dB	0.3 dB
WDL	0.3 dB	0.3 dB	0.5 dB	0.5 dB	0.5 dB
Return Loss, Min.	55 dB				
Directivity, Min.	55 dB				
Cable Type	G.657.A1 Fiber, 900um Input, 250um Output				
Cable Leg Length	1M (Standard)				
Operating Temperature	-40°C to +85°C Install, -55°C to +85°C Operational				
Module Dimensions	4mm H x 4mm W x 40mm L	4mm H x 7mm W x 50mm L		4mm H x 12mm W x 60mm L	
Compliance	ITU-T G.657.A1, GR-326, GR-1209, GR-1221				

ORDERING INFORMATION

Model #	Description	Standard Pkg.
PLCR104NA1M	PLC Splitter SM Bare Fiber Ribbon 1x4 1M	1 ea. 12" x 12" x 2" - 1 lbs.
PLCR108NA1M	PLC Splitter SM Bare Fiber Ribbon 1x8 1M	
PLCR116NA1M	PLC Splitter SM Bare Fiber Ribbon 1x16 1M	
PLCR132NA1M	PLC Splitter SM Bare Fiber Ribbon 1x32 1M	
PLCR164NA1M	PLC Splitter SM Bare Fiber Ribbon 1x64 1M	