

508F-SPL

48F Indoor/Outdoor Splice Housing


CPE/Premise Wiring

DOT

FTTx

MDU

PON

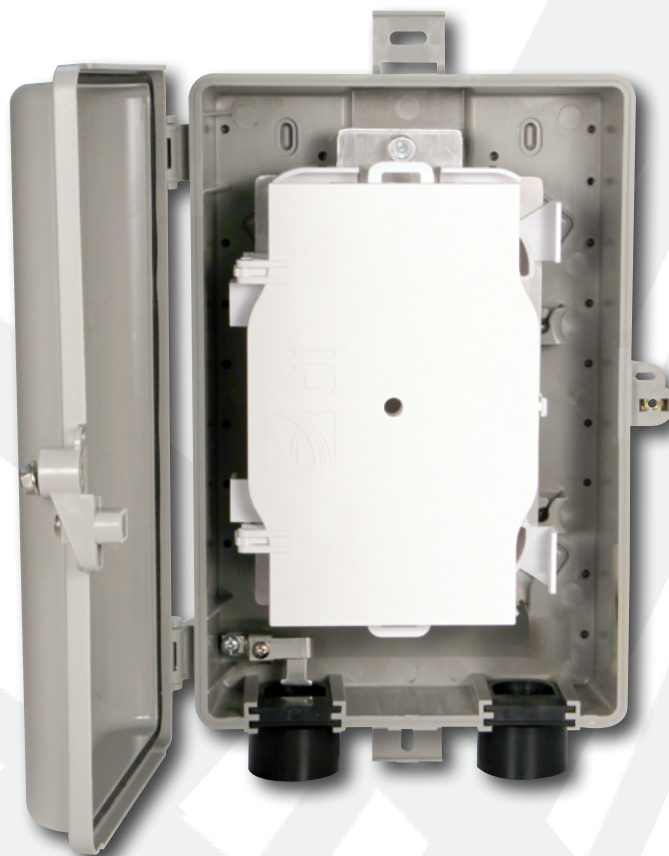

The 508F-SPL Outdoor Splice Enclosure is a compact unit which can accommodate up to Two (2) FST-ASF24 24-fiber splice trays.

This weatherproof design is ideally suited for outdoor pole or wall mount installations and is configured to accommodate up to 48F splicing.

KEY PRODUCT BENEFITS

- ▶ Provides splice point between outdoor fiber cable and indoor cable
- ▶ Can be used as a riser accumulation splice point in MDU/MTU's
- ▶ Constructed of superior materials capable of withstanding harsh outdoor environments, including UV degradation, chemical exposure, and extreme temperatures
- ▶ Entry grommets accept up to 1 inch conduit with provision for tie wrap retention
- ▶ 2X internal tie down features for proper strain relief of fiber cables
- ▶ Hinged cover fits securely on the base to provide maximum protection against environmental conditions and intrusion of foreign matter, protecting sensitive fiber connectivity. Cover closes securely with 3/8" hex head bolt and has a provision for a tie-wrap.

INDUSTRY STANDARDS

- ▶ TPR-9459
- ▶ Meets GR-771 Requirements
- ▶ cUL Listed to 1863



Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive


Edgewood, NY 11717

Phone: 631.789.5000

Fax: 631.789.5063

Toll Free: 888.844.4720

sales@tiitech.com

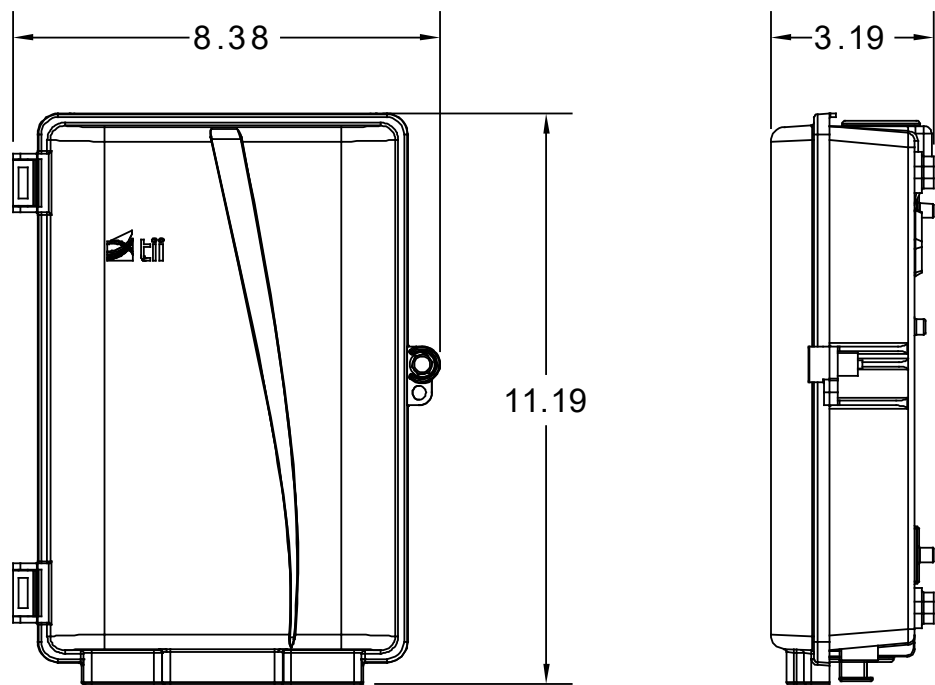

Dimensions are in Inches

ORDERING INFORMATION

508F	—SPL	XX	—X	X
		Splice Trays	Configuration Options	Grommets (Optional)
		01 = 1 Tray 02 = 2 Trays	N = None C = Cable Entry Clamp E = External Ground D = External Ground and Cable Entry Clamp	Blank = 2 Standard Grommets C = 2 Conduit Grommets G = 1 Standard Grommet, 1 Conduit Grommet

ACCESSORIES

Model #	Description
FST-ASF24	Splice Tray 24 Single Fusion
FST-AMF06	Splice Tray 6 Mass Fusion 72 Fibers
FST-AUNIV	Splice Tray Universal 24 Single / 6 Mass Fusion