WM08BT Series

Wall Mount
Patch & Splice
Fiber Enclosure

CPE/Premise Wiring

FTTP

MDU



 ${\it Corporate Headquarters:}$

141 Rodeo Drive Edgewood, NY 11717 Phone: 631.789.5000 Fax: 631.789.5063 Toll Free: 888.844.4720 sales@tiitech.com



Wall mount fiber distribution unit designed to support patching and splicing in one unit. The enclosure has 8 adapter panel positions, allowing for a wide variety of fiber termination connector types. Two compartments separate the network terminations from the distribution terminations.


FEATURES


- Accommodates up to 96 Fiber Ports
- Available with factory loaded adapter plates, splice trays and pigtails
- Suitable for loose tube, tight buffer and ribbon cable
- Cable entry tie down points
- Double door with key lock
- Top or bottom cable entry
- LGX® compatible adapter plates

STANDARDS COMPLIANCE

NEMA-2

WM08BT Series

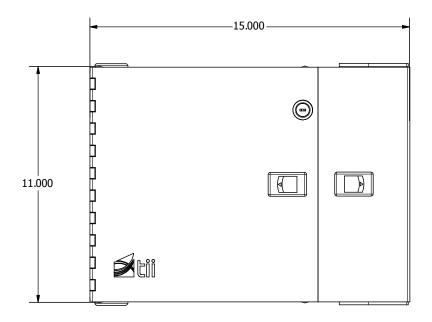



Dimensions are in Inches

MODEL NUMBER MATRIX

WM08BT	XXX	X	XX	X
	Fiber Ports	Fiber Type	Adapter	Pigtails & Splice Trays
	048	R = Singlemode	FC = FC	N = None
	072	K = MM62.5 OM1	FA = FC APC	9 = 900um
	096	C = MM50 OM2	LC = LC	R = 12 Fiber Ribbon
		S = MM50 OM3	SC = SC	
			SA = SC APC	
			ST = ST	

SPECIFICATIONS

Model #	Description
Adapter Plates	8
Splice Trays	8
Dimensions	11" H x 15" W x 6.0" D
Packaging	12" H x 17" W x 8" D
Weight	10 lbs. empty, 15 lbs. typical loaded
Material	Aluminum, black powder coat

ORDERING INFORMATION / ACCESSORIES

Model #	Description
WM08BT	Wallmount Patch Panel Double Door 8 Plate Capacity
LG1-xxxxxx-B	LG1 series adapter plates in black (See LG1 datasheet)