

FET1 Series

Fiber Entrance Terminal

CPE/Premise Wiring

DOT

FTTx

PON



FET1G-01RSA9

The FET1 is a compact, patch and splice enclosure which is designed to provide a demarcation and transition point between fiber drop cable and the customer premise fiber cable. The internal fiber routing system allows for proper bend radius and slack storage of bend insensitive fiber.

KEY PRODUCT BENEFITS

- ▶ Indoor/outdoor for wall or pole mounting
- ▶ Modular adapter plate snaps easily into existing FET1 enclosure
- ▶ Compact unit can terminate and store up to single fiber cable drops
- ▶ One, two, or four LC, SC, SC-APC adapters for OSP to customer fiber transition
- ▶ Unique design allows for proper bend radius and strain relief of fiber cable
- ▶ The FET1 features patented scalloped sides designed to provide easy internal access to the enclosure.
- ▶ Compact, low profile design for applications where space is limited
- ▶ Exterior ground included

INDUSTRY STANDARDS

- ▶ Meets GR-771 requirements
- ▶ Meets GR-1361-CORE Severe Environmental Conditions (-40°C–80°C)



Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive


Edgewood, NY 11717

Phone: 631.789.5000

Toll Free: 888.844.4720

sales@tiitech.com

FET1 Series

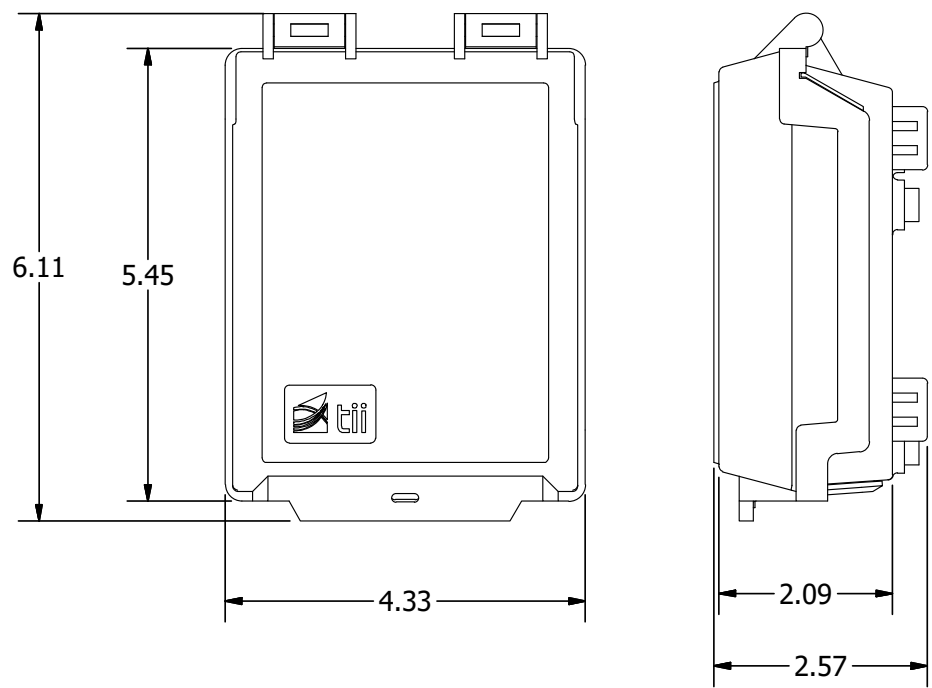

Dimensions are in Inches

Model No.	Description	Standard Pkg.
FET1G	Fiber Entry Terminal, Empty, 1 LGX Adapter Plate Capacity	20 ea. 14" x 12.5" x 9.5" - 10.8 lbs.

ORDERING INFORMATION

FET1G—	XX	X	XX	X
	Fibers	Fiber Type	Adapters	Loading Configuration
	01	R = Singlemode	LC = LC	N = Patch Only
	02	K = MM62.5 OM1	SC = SC	9 = 900um Pigtailed Splice Chip
	03	S = MM50 OM3	SA = SC APC	(2 port maximum)
	04*		NA = None	

* Patch & splice configuration 2 port maximum, patch only configuration up to 4 fiber ports