

3600 Series

Six-Line Broadband Outdoor Network Interface Devices

CPE/Premise Wiring

DOT

MDU

Utility/Municipality




Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

www.tiitech.com

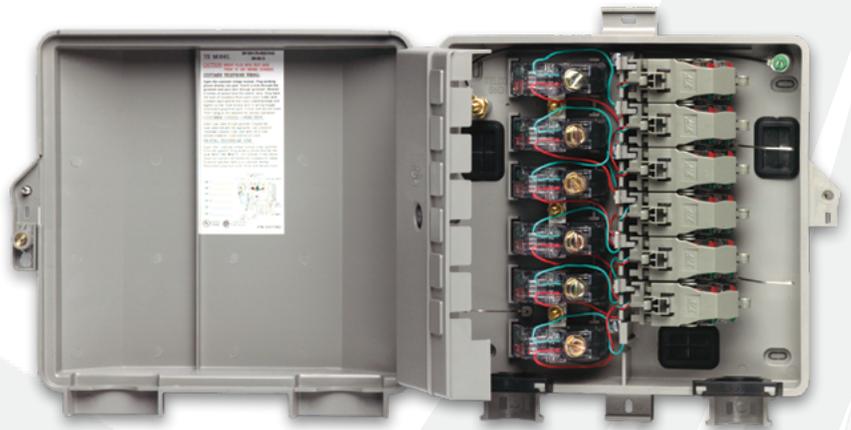

3616H-78-6100

The 3600 broadband outdoor Network Interface Device (NID) is a versatile, heavy duty six-pair housing. It accommodates a variety of coaxial and twisted pair drop combinations, while providing superior protection and performance in the harshest outdoor environments.


KEY PRODUCT BENEFITS

- ▶ Constructed of superior materials to withstand harsh indoor and outdoor environments, such as UV degradation, chemical exposure and cold temperatures.
- ▶ Low profile design and rear entry grommets allow complete access to all components for easy installation and servicing.
- ▶ All internal components — protector modules, customer bridges and coax modules — are completely modular, allowing for simple field expansion.
- ▶ Molded in ground strap commonly grounds and bonds all protectors together while eliminating telco wiring clutter.
- ▶ Superior wire management access.
- ▶ Standard features include customer locking/telco bypass, separate customer and telco compartments and fully hinged covers.
- ▶ A ground termination point is located in the upper most position of the customer compartment.
- ▶ Supports RG-6 coax drops, providing straight through or protected bulkhead connections.
- ▶ The 3600's superior performing Customer Bridge Module (CBM) includes Tii's Auto-Jack® RJ-11, requires no RJ-11 plug and is protected from the environment.
- ▶ Features Tii's Coax Service Module (CSM), which accommodates Tii's In-Line® Coax Surge Protector and easily snaps into the standard Customer Bridge Module footprint.

INDUSTRY STANDARDS

- ▶ IDC connections exceed Telcordia requirements for sealed terminations.
- ▶ Protection modules exceed Telcordia GR-1361-CORE "Generic Requirements for Gas Tube Protectors" and Telcordia TR-NWT-000975, "Generic Requirements For Unprotected Terminal Blocks."
- ▶ Meets GR-1361-CORE "Severe Environmental Conditions" (-40°C - 80°C)
- ▶ Customer Bridge Module meets Telcordia "Normal and Severe Climatic" requirements for first and second level lightning surges
- ▶ Third Party Tested by Telcordia to GR-49-CORE
- ▶ Listed to UL 497

3600 Series

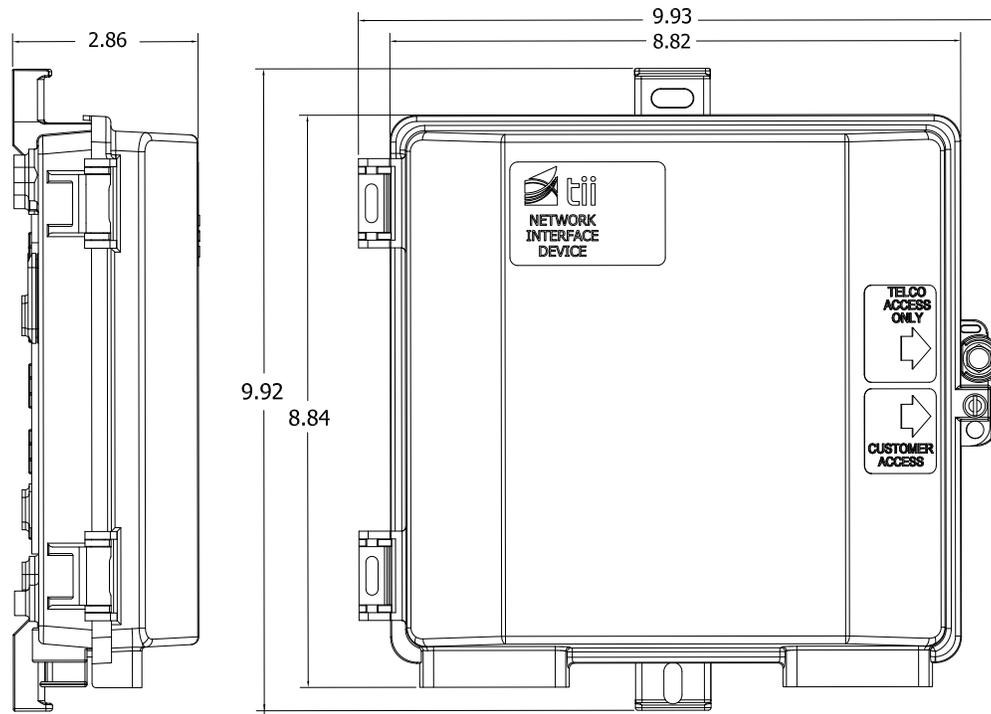

Dimensions are in Inches

ORDERING INFORMATION

361	X	X	XX	X	X	XX	X
No. of Station Protectors	Security Screw	Station Protectors	No. of CBMs	Customer Bridge Module			Coax Service Module Type
				Wiring Type	Electronics		
0 = None	H = Hex Head	00 = None	0 = None	0 = None	00 = None	0 = None	
1 = One	P = Pin-In-	01 = 356L	1 = One	S = Insulated Screws	12 = VDSL2 POTS Splitter	1 = Straight Thru	
2 = Two	Head	07 = 355M	2 = Two	I = IDC Terminations	14 = VDSL2 POTS Splitter with EMI Filter	2 = Protected	
3 = Three		17 = 126L1	3 = Three				
4 = Four		22 = 122	4 = Four				
5 = Five		78 = AD-01W-LP	5 = Five				
6 = Six		87 = ADX-L/R or W	6 = Six				

Standard Package: 5 Pieces

Weight: 1.57 lbs. (enclosure only)

NOTE: The 3600 NID has been designed to accommodate a maximum combined quantity of six Customer Bridge and Coax Service Modules using RG-6 cable.