

525, 1525 Series

25 Pair, 5-Pin Building Entrance Protector Packs

CPE/Premise Wiring


DOT

MDU

PON

Utility/Municipality

Wireless

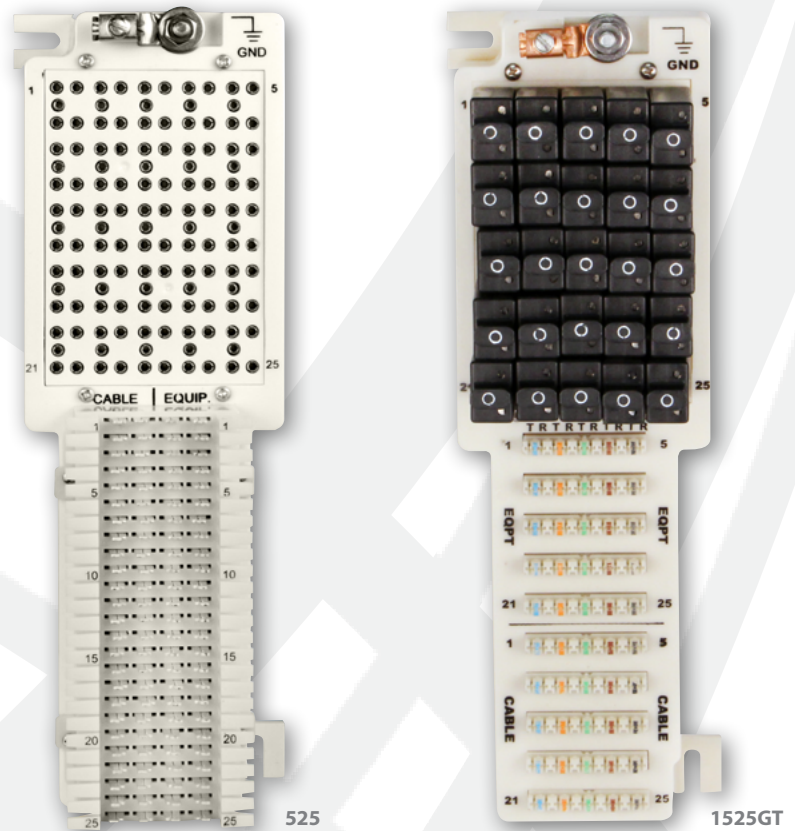

This twenty-five pair, five-pin protector pack series is UL listed for primary/secondary protection and suitable for use at the customer premise demarcation point. Also used for runs between buildings in an industrial, commercial, or campus environment to protect communication networks.

KEY PRODUCT BENEFITS

- ▶ Utilizes industry standard 5-pin protector modules
- ▶ Features 66 or 110 IDC termination input and output
- ▶ High-impact, fire retardant housing
- ▶ Units can be cascaded to provide for expansion
- ▶ Can be mounted to 89 style stand-off brackets
- ▶ Compact, lightweight design

INDUSTRY STANDARDS

- ▶ UL 497 Listed for primary protection
- ▶ UL 497A & 497B Listed for secondary protection




Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

525, 1525 Series

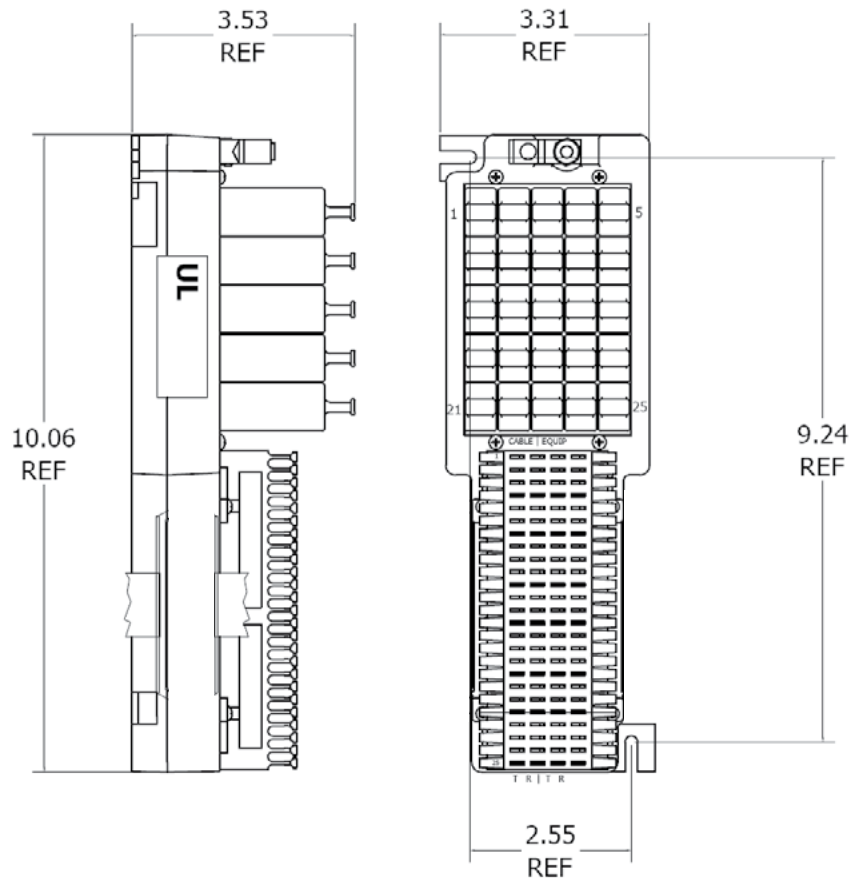

Dimensions are in inches

SPECIFICATIONS

	Dimensions (height x width x depth)	Weight (approx.)
525	10" x 3.4" x 3.5" (25.4 cm x 11.7 cm x 8.2 cm)	2 lbs.
1525		

ORDERING INFORMATION

Model #	Pair Count	Input	Output	Modules	Module Model#
525	25	66	66	None	N/A
525GT*	25	66	66	230V Gas Tube	175-3C1EW-NL
1525	25	110	110	None	N/A
1525GT*	25	110	110	350V Gas Tube	175-3C1EW-NL

*MOQ 5 units