

FDH1 Series

Fiber Distribution Hub

24-48 Port Fiber Distribution Hub for Indoor/Outdoor Demarcation Points and MDU Distribution


Flexible, Multi-Application Use

Available with Adapters, Splice Trays and Pigtailed

Five Splitter Module Capacity

Multiple Cable Entry Points

Removable/Lockable Door

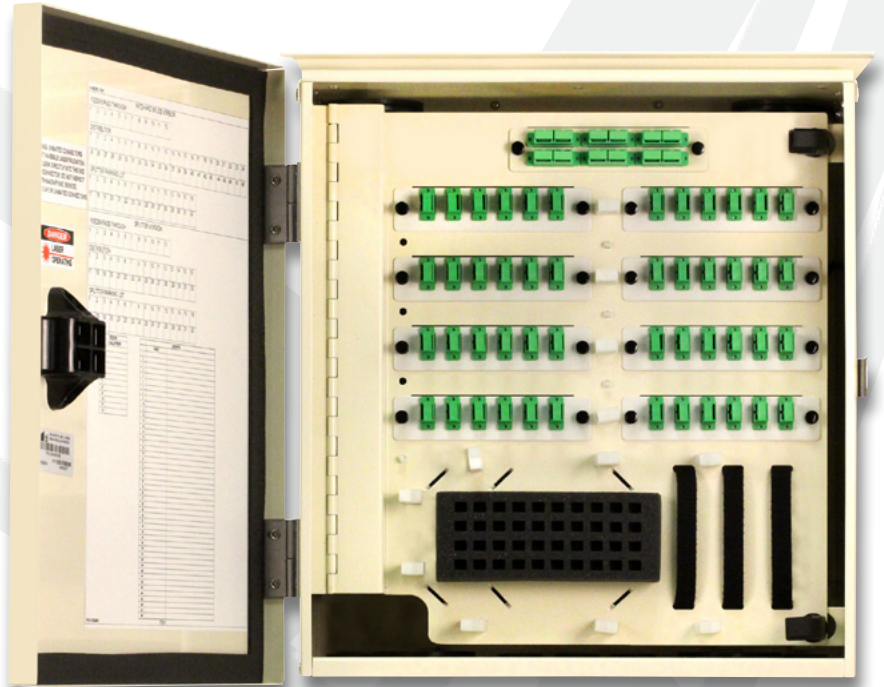

The FDH1 Series is a wall mount fiber distribution hub designed to support patching, splicing and optical splitting in one unit. The enclosure has 9 adapter panel positions allowing for a wide variety of patching and splitting combinations. Two compartments separate the network terminations from the distribution terminations and a single outer door.

KEY PRODUCT BENEFITS

- ▶ Accommodates 12-48 fiber ports for use in indoor and outdoor demarcation points and MDU distribution applications
- ▶ Available with adapters, splice trays and pigtailed
- ▶ Door is removable for easy handling and maintenance
- ▶ Multiple cable entry points for quick termination
- ▶ Five splitter module capacity




Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

FDH1 Series

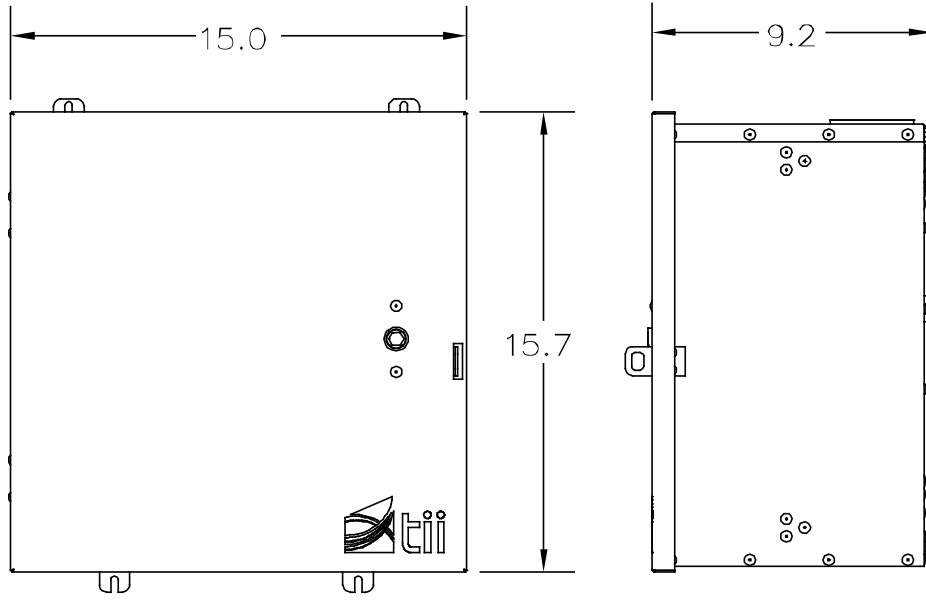

Dimensions are in Inches

ORDERING INFORMATION

FDH1*	X	X	XX	X	X	X	X	X	X
Ports	Fiber Mode	Adapters	Feeder Loaded	Feeder Fiber Count	Distribution Loaded	24 Fiber Splice Trays	Splitter Type	Splitter Qty Loaded	
B - 12	R - OS2	LC - LC UPC	0 - None	0 - None	0 - None	0 - None	0 - None	0 - None	0 - None
F - 24		SA - SC APC	1 - M1 Fanout	6 - 6	5 - 250um Pigtails	1 - 1 ea.	1 - 1x8	1 - 1 ea.	
G - 32		SC - SC UPC	5 - 250um Pigtail	B - 12	9 - 900um Pigtails	2 - 2 ea.	2 - 1x16	2 - 2 ea.	
H - 36		TP - MTP	9 - 900um Pigtail	F - 24	M - MPO Fanout	3 - 3 ea.	3 - 1x32	3 - 3 ea.	
J - 48			R - Ribbon Pigtail	G - 32	R - Ribbon Pigtails	4 - 4 ea.		4 - 4 ea.	
L - 72				H - 36				5 - 5 ea.	
P - 144				J - 48					
S - 288									
U - 432									

* Pair of Optional 19" or 23" Rackmount Ears - Model Number: FDH1RM