

61 Series


Cat6 Termination Block

CPE/Premise Wiring

MDU

Utility/Municipality

Wireless

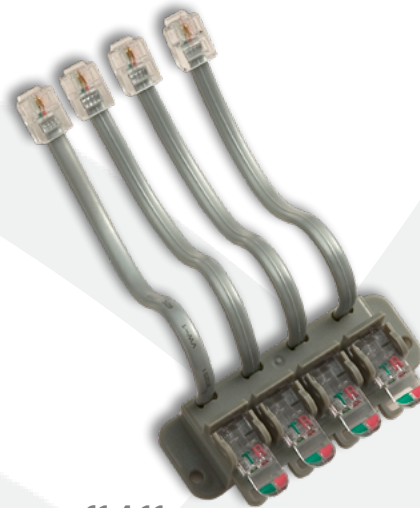

61-4-11



61-1-45

The 61 Series Category Cat6 Termination Block is designed to accept Ethernet cable pairs without having to pre-terminate an RJ-45 or RJ-11. Converts cable pairs to RJ-45 or RJ-11 male plug end without the need for special tooling. Ideal for fiber to the home (FTTH) ONT applications.

KEY PRODUCT BENEFITS

- ▶ Terminations are made to gel-sealed Insulation Displacement Contacts (IDC) by means of convenient tool-less rocker assemblies eliminating need for field RJ-45 or RJ-11 connector terminations. Wire stripping not required.
- ▶ Adapts Ethernet cable wire pairs to a RJ-45 interface and is available in both T568A and T568B configurations
- ▶ Available in RJ-48C configuration with two RJ-45 male plugs, and RJ-11 configuration with one or four RJ-11 male plugs
- ▶ Equipped with RJ-45 and RJ-11 pigtail(s)
- ▶ Compact, craft-friendly, low profile design fits into applications where space is limited
- ▶ Mounts easily on a suitable flat surface; can be installed in Tii indoor/outdoor wire terminal housing
- ▶ Accepts 26 through 22 gauge solid conductor wire sizes

INDUSTRY STANDARDS

- ▶ Cat6 Compliant
- ▶ Meets UL 94 V-0 Flammability Rating
- ▶ Listed to UL 1863
- ▶ RoHS Compliant




Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

61 Series

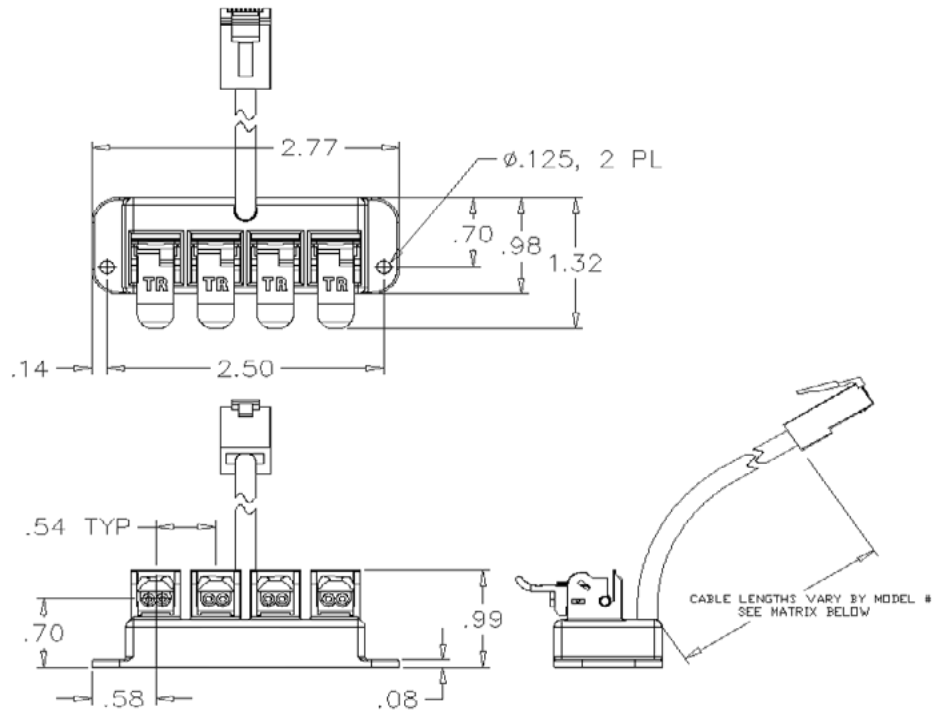

Dimensions are in Inches

Tolerance for all dimensions is +/- 0.050 inches

ORDERING INFORMATION

Model No.	Description	Cable Length
61-1-45B	4 Rocker IDC Bridge with One RJ-45 Cable Out Wired per T568B Configuration	8.0 +/- 0.25 inches
61-2-45C	4 Rocker IDC Bridge with Two RJ-45 Cables Out Wired per RJ-48C Configuration	8.0 +/- 0.25 inches
61-1-11	4 Rocker IDC Bridge with One RJ-11 Cable Out Wired per RJ-11 Configuration	5.0 +/- 0.25 inches
61-1-11-RJ	4 Rocker IDC Bridge with One RJ-11 Cable Out Wired per RJ-11 Configuration (Available in bulk package only - 320 units)	6.0 +/- 0.25 inches
61-4-11-2	4 Rocker IDC Bridge with Four RJ-11 Cables for Four POTS Lines per RJ-11 Configuration	2.5 +/- 0.25 inches
61-4-11	4 Rocker IDC Bridge with Four RJ-11 Cables for Four POTS Lines per RJ-11 Configuration	5.0 +/- 0.25 inches
61-4-11-RJ	4 Rocker IDC Bridge with Four RJ-11 Cables for Four POTS Lines per RJ-11 Configuration (Available in bulk package only - 320 units)	6.0 +/- 0.25 inches

INFORMATION CONTAINED IN THIS PUBLICATION IS PROVIDED ONLY FOR YOUR CONVENIENCE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. TII TECHNOLOGIES MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE; AND TII TECHNOLOGIES DISCLAIMS ALL LIABILITY ARISING FROM THE USE OF THIS INFORMATION.